


THE ULTIMATE HTML CHEAT SHEET BY PUSH AUNE

How HTML works

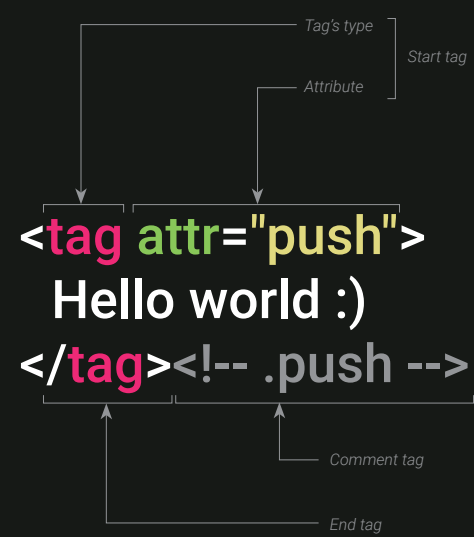

Head

<link> Document's external source	as crossorigin href hreflang integrity media rel sizes title type g.attr.
<base> The base URL to use for all relative URLs	href target g.attr.
<meta> Metadata informations	charset content http-equiv name g.attr.
<script> Embed an executable script	async crossorigin defer integrity src text type g.attr.
<style> Style informations	type media title g.attr.
<title> The title of the document	g.attr.

Sectioning content

<html> Top level element of a HTML document	xmlns g.attr.
<head> Metadadats about the document	g.attr.
<body> The HTML's document content	onafterprint onbeforeprint onbeforeunload onblur onerror onfocus onhashchange onload onmessage onoffline ononline onpopstate onredo onresize onstorage onundo onunload onlanguagechange g.attr.
<header> Introductory content	g.attr.
<nav> Navigation	g.attr.
<main> Content of the document	g.attr.
<aside> Section connected tangentially to the main content	g.attr.
<section> Standalone section	g.attr.
<article> Self-contained composition	g.attr.
<footer> Footer of the nearest sectioning content	g.attr.
<div> Generic container for flow content	g.attr.

Text

<h1 - h6> Six levels of section headings	g.attr.
<hgroup> Multi-level heading	g.attr.
<p> Paragraph	g.attr.
<address> Article or body address	g.attr.
<details> Disclosure widget that reveals more informations	open g.attr.
<summary> Summary, caption, or legend of a <details> element	g.attr.
<dfn> The defining instance of a term	g.attr.

Quotations

<blockquote> Extended quotation	cite g.attr.
<cite> Reference to a creative work	g.attr.
<q> Short quote	cite g.attr.

List

 Unordered list of items	g.attr.
 Ordered list of items	reversed start type g.attr.
 Item in a list	value g.attr.
<dl> Description list	g.attr.
<dt> Term in a <dl> description list	g.attr.
<dd> The description of a term in a <dl> description list	g.attr.

Text-level semantics

<a> Hyperlink	href hreflang ping target ping referrerpolicy rel type download g.attr.
 Gives text strong importance	g.attr.
 No special importance, but in bold	g.attr.
 Give text stress emphasis	g.attr.
<i> No special importance, but in italic	g.attr.

Text

 Range of text that has been deleted	cite datetime g.attr.
<ins> Range of text that has been added	cite datetime g.attr.
<abbr> Abbreviation	title g.attr.
<mark> Highlighted text	g.attr.
<s> No longer relevant or no longer accurate	g.attr.
<u> Underline	g.attr.
<sup> Exponent	g.attr.
<sub> Subscript	g.attr.
<small> Side-comments and small print	g.attr.
 Generic inline container for phrasing content	g.attr.

Code and system messages

<code> Display short code	g.attr.
---	---------

<kbd> Keyboard elements or shortcuts	g.attr.
<samp> Sample output from a computer program	g.attr.
<pre> Preformatted text	g.attr.

Auto fermantes

 Line break in text	g.attr.
<hr> Thematic break between paragraph-level elements	g.attr.

Data

<progress> The completion progress of a task	max value g.attr.
<meter> Scalar or fractional value	form optimum high low min max value g.attr.
<time> Time or date	datetime g.attr.
<var> Variable	g.attr.
<data> Machine-readable translation	g.attr.

Forms

<form> Form container	target novalidate name method enctype autocomplete action accept-charset g.attr.
<input> types: button, checkbox, color, date, datetime-local, email, file, hidden, image, month, number, password, radio, range, reset, search, submit, tel, text, time, url, week	width value tabindex step src spellcheck size selectionStart selectionEnd selectionDirection required readonly placeholder pattern name multiple minlength maxlength min max list inputmode height formtarget formnovalidate formmethod formenctype formation form disabled checked capture autofocus autocomplete accept type g.attr.
<textarea> multi-line plain-text editing control	wrap spellcheck required readonly placeholder name minlength maxlength form disabled rows cols autofocus autocomplete g.attr.
<select> Menu of options	size required name multiple form disabled autofocus g.attr.
<optgroup> Group of options within a <select> element	label disabled g.attr.
<datalist> Elements that represent the values available for other controls	g.attr.
<option> Contained in <select>, <optgroup>, <datalist>	value selected label disabled g.attr.
<legend> Caption for the content of its parent <fieldset>	g.attr.
<label> Caption for an item in a user interface	for g.attr.

<fieldset> Group several controls	name form disabled g.attr.
<output> Result of a calculation or user action	name form for g.attr.
<button> Clickable button	value type name formtarget formnovalidate formmethod formenctype formation name form disabled autofocus g.attr.

Media

<map> Image map (a clickable link area)	name g.attr.
<area> Spot region on a <map>	target shape rel referrerpolicy media hreflang href download coords alt g.attr.
<audio> Embed sound content	volume src preload played muted loop controls buffered autoplay g.attr.
<video> Embed video content	playsinline width poster height volume src preload played muted loop controls crossorigin buffered autoplay g.attr.
<source> Multiple media resources	media type srcset src sizes g.attr.
<track> Subtitles	srclang src label kind default g.attr.
<picture> Multiple <source> elements for a specific 	g.attr.
 Image	usemap srcset src sizes referrerpolicy longdesc ismap width height crossorigin alt g.attr.
<canvas> Element to draw graphics and animations	height width g.attr.
<embed> Integrate external plug-in	src type height width g.attr.
<iframe> Nested browsing context	srcdoc src referrerpolicy name width height allowpaymentrequest allowfullscreen g.attr.
<figure> Self-contained content	g.attr.
<figcaption> Caption or a legend associated with a figure	g.attr.
<object> External resource	width usemap typemustmatch type name height form data g.attr.
<param> Defines parameters for an <object> element	value name g.attr.

Forms

<form> Form container	target novalidate name method enctype autocomplete action accept-charset g.attr.
<input> types: button, checkbox, color, date, datetime-local, email, file, hidden, image, month, number, password, radio, range, reset, search, submit, tel, text, time, url, week	width value tabindex step src spellcheck size selectionStart selectionEnd selectionDirection required readonly placeholder pattern name multiple minlength maxlength min max list inputmode height formtarget formnovalidate formmethod formenctype formation form disabled checked capture autofocus autocomplete accept type g.attr.
<textarea> multi-line plain-text editing control	wrap spellcheck required readonly placeholder name minlength maxlength form disabled rows cols autofocus autocomplete g.attr.
<select> Menu of options	size required name multiple form disabled autofocus g.attr.
<optgroup> Group of options within a <select> element	label disabled g.attr.
<datalist> Elements that represent the values available for other controls	g.attr.
<option> Contained in <select>, <optgroup>, <datalist>	value selected label disabled g.attr.
<legend> Caption for the content of its parent <fieldset>	g.attr.
<label> Caption for an item in a user interface	for g.attr.

SVG <!-- Shape elements -->

<svg> Embed an SVG fragment	viewBox contentStyleType contentScriptType preserveAspectRatio height width y x baseProfile version g.attr.
---	---

<path> Generic element to define a shape	d fillOpacity pathLength g.attr.
<rect> Rectangle shape	ry rx y x height width g.attr.
<circle> Circle shape	r cx cy g.attr.
<ellipse> Ellipse shape	rx ry cx cy g.attr.
<line> Line connecting two points	x1 x2 y1 y2 g.attr.
<polygon> Set of connected straight line segments	points g.attr.
<polyline> Basic shape, creates straight lines connecting several points	points g.attr.

Media

<map> Image map (a clickable link area)	name g.attr.
<area> Spot region on a <map>	target shape rel referrerpolicy media hreflang href download coords alt g.attr.
<audio> Embed sound content	volume src preload played muted loop controls buffered autoplay g.attr.
<video> Embed video content	playsinline width poster height volume src preload played muted loop controls crossorigin buffered autoplay g.attr.
<source> Multiple media resources	media type srcset src sizes g.attr.
<track> Subtitles	srclang src label kind default g.attr.
<picture> Multiple <source> elements for a specific 	g.attr.
 Image	usemap srcset src sizes referrerpolicy longdesc ismap width height crossorigin alt g.attr.
<canvas> Element to draw graphics and animations	height width g.attr.
<embed> Integrate external plug-in	src type height width g.attr.
<iframe> Nested browsing context	srcdoc src referrerpolicy name width height allowpaymentrequest allowfullscreen g.attr.
<figure> Self-contained content	g.attr.
<figcaption> Caption or a legend associated with a figure	g.attr.
<object> External resource	width usemap typemustmatch type name height form data g.attr.
<param> Defines parameters for an <object> element	value name g.attr.

Forms

<form> Form container	target novalidate name method enctype autocomplete action accept-charset g.attr.
<input> types: button, checkbox, color, date, datetime-local, email, file, hidden, image, month, number, password, radio, range, reset, search, submit, tel, text, time, url, week	width value tabindex step src spellcheck size selectionStart selectionEnd selectionDirection required readonly placeholder pattern name multiple minlength maxlength min max list inputmode height formtarget formnovalidate formmethod formenctype formation form disabled checked capture autofocus autocomplete accept type g.attr.
<textarea> multi-line plain-text editing control	wrap spellcheck required readonly placeholder name minlength maxlength form disabled rows cols autofocus autocomplete g.attr.
<select> Menu of options	size required name multiple form disabled autofocus g.attr.
<optgroup> Group of options within a <select> element	label disabled g.attr.
<datalist> Elements that represent the values available for other controls	g.attr.
<option> Contained in <select>, <optgroup>, <datalist>	value selected label disabled g.attr.
<legend> Caption for the content of its parent <fieldset>	g.attr.
<label> Caption for an item in a user interface	for g.attr.

SVG <!-- Light -->

<feSpotLight> Spotlight effect	limitingConeAngle specularExponent pointsAtZ pointsAtY pointsAtX xml:base xml:lang xml:space tabindex id x y z g.attr.
--	--

<fePointLight> Point light effect	xml:base xml:lang xml:space tabindex id x y z g.attr.
---	---

SVG <!-- Gradients -->

<linearGradient> Linear gradient	xlink:href spreadMethod x1 x2 y1 y2 gradientTransform gradientUnits g.attr.
<radialGradient> Radial gradient	xlink:href spreadMethod fr fy fx r cy cx gradientTransform gradientUnits g.attr.
<stop> Ramp of colors to use on a gradient	offset stop-color stop-opacity g.attr.

Table

<table> How to display tabular data	g.attr.
<caption> The title of a table	g.attr.
<col> A column within a table	span g.attr.
<colgroup> A group of columns within a table	span g.attr.
<tr> A row of a table	cells rowIndex sectionRowIndex g.attr.
<td> A cell of a table that contains data	colspan headers rowspan g.attr.
<thead> A set of rows defining the head of the columns	g.attr.
<tbody> Groups one or more <tr> elements as the body of a <table>	g.attr.
<tfoot> Defines a set of rows summarizing the columns of the table	g.attr.
<th> Defines a cell as header of a group of cells	colspan headers rowspan scope g.attr.

Miscellaneous

<noscript> Unsupported or currently turned off in the browser	g.attr.
---	---------

inline tags | block tags | table-cell tags | Global attributes (g.attr.): class | id | accesskey | contenteditable | contextmenu | data-* | dir | draggable | dropzone | hidden | itemid | itemprop | itemref | itemscope | itemtype | lang | slot | spellcheck | style | tabindex | title | translate

CHECK OUT THE ULTIMATE CSS CHEAT SHEET:

